




DUTCH QUALITY

Craftsmanship Rooted In Age-old Tradition





We combine fine craftsmanship with innovative production techniques. The result is a stunning collection of veneer stones readily available for on-time shipment to our dealer network. Dutch Quality Stone veneers exhibit all the unique qualities of nature in a range of dependable, easy-to-install options for residential and commercial properties.



A B O U T U S

H a r d W o r k H o n e s t y G e n u i n e C a r e

Nestled in Wayne County, Ohio, Dutch Quality Stone™ has been at the forefront of advanced stone replication for over two decades, perfecting the process of recreating incredibly vivid stone products. Known as the “Gateway to Amish Country,” Wayne County is home to a wealth of skilled artisans, many of whom are employed at Dutch Quality Stone.

Amish craftsmanship is revered throughout the world, and our production facilities are located in the heart of one of the biggest Amish communities in America. When values such as honesty, old-fashioned work ethic and service are combined with advanced production techniques, our Wayne County home becomes another reason Dutch Quality Stone is the best choice for your project.

OUR PRODUCTS

Choose Dutch Quality when you want to create a warm, welcoming look for your home or commercial property.

Solutions that fit your budget, time frame, and vision.



STONE VENEER
12 Profiles



ACCESSORIES
12 Styles



STONE VENEER

12 unique profiles with a variety of warm, natural colors



WEATHERED PLANK 4



WEATHERED PLANK 6




DRY STACK



WEATHER LEDGE



LEDGESTONE

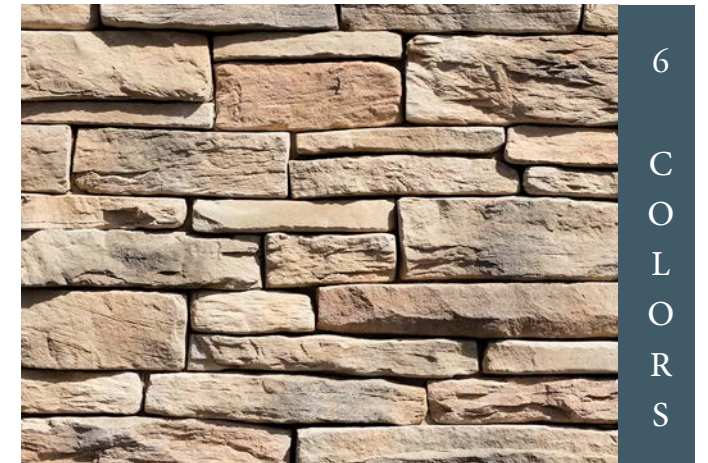

STACK LEDGE

STONE VENEER

12 unique profiles with a variety of warm, natural colors




LIMESTONE




FIELDSTONE



RIVER ROCK

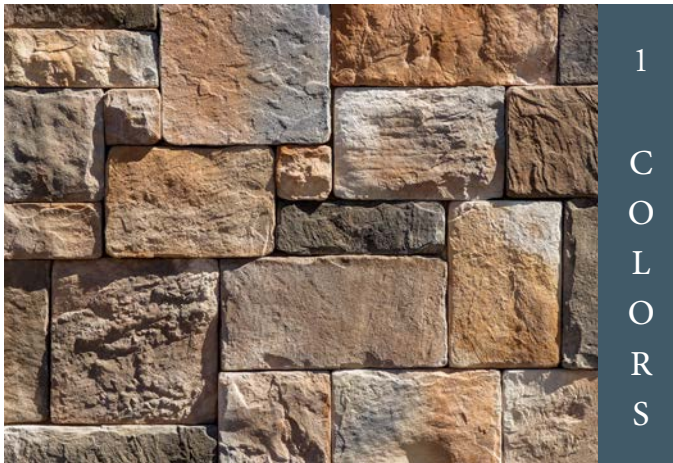

CASTLE STONE

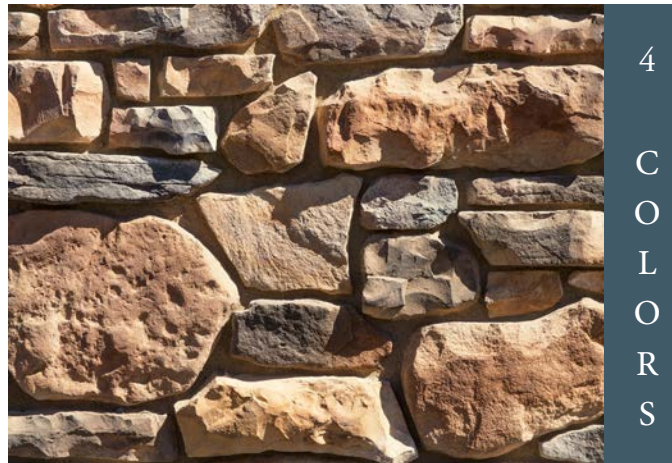

TUSCAN RIDGE



TUSCANY VENEER

LEADING COLORS



SIENNA
Weather Ledge




NATURAL BLEND
Ledge stone



PRESTIGE
Weather Ledge



PENNSYLVANIA
Ledge stone

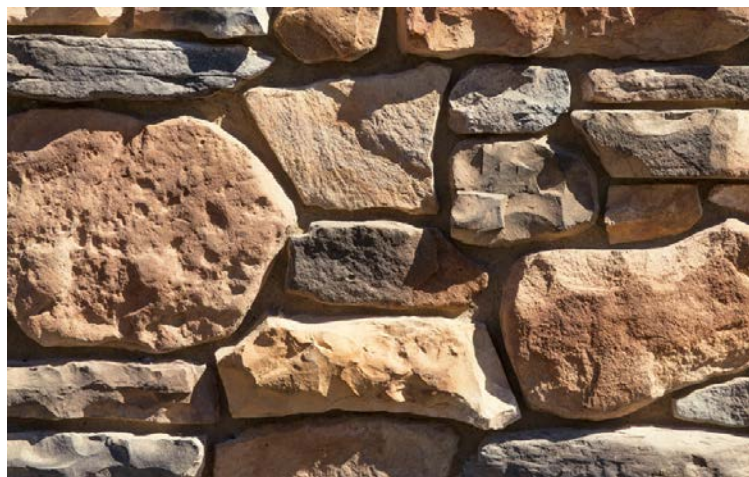

SIENNA
Tuscan Ridge



ASHEN
Dry Stack



ACCESSORIES

Complimentary color palettes designed in shapes to finish off a project or transition from stone to another material

Wall Caps
Column Caps
Sills
Trim
Utility Accents
Quoins
Mantels
... And More





Sagewood LEDGESTONE



Quail Grey WEATHER LEDGE





Natural Blend LEDGESTONE



Cypress LEDGESTONE

BRAND SUPPORT

Brand touch points focused on inspiration, information, presentation and technical knowledge to make it easy for customers to choose our products

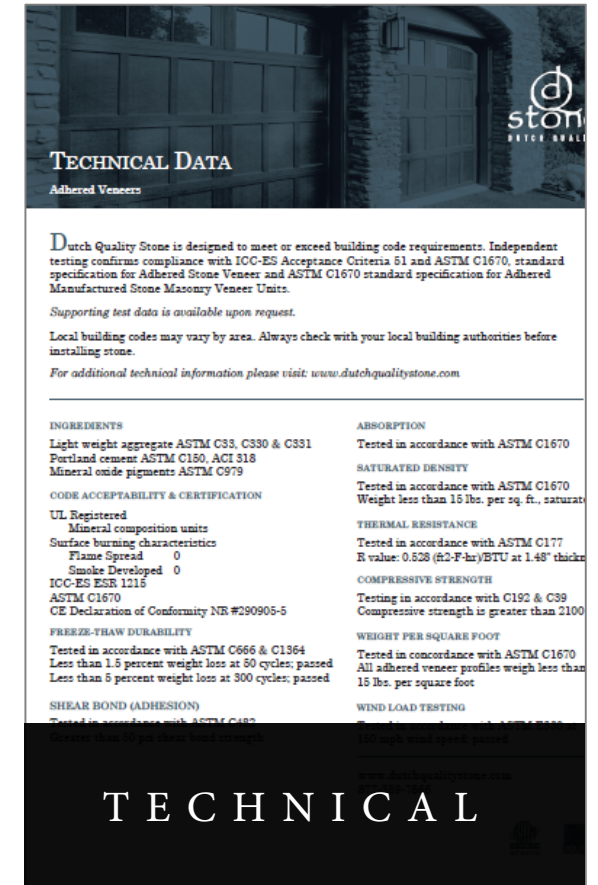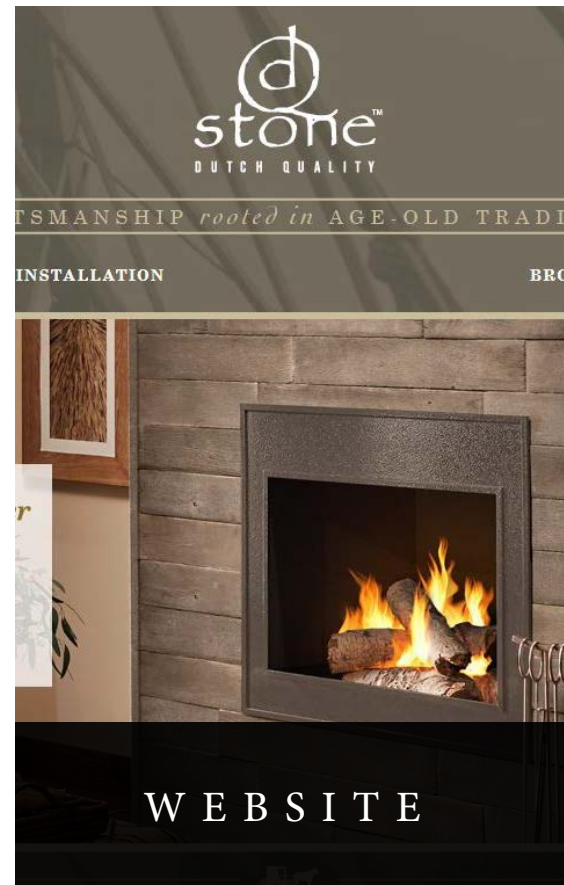

TECHNICAL DATA

Adhered Veneers

Dutch Quality Stone is designed to meet or exceed building code requirements. Independent testing confirms compliance with ICC-ES Acceptance Criteria 51 and ASTM C1670, standard specification for Adhered Stone Veneer and ASTM C1670 standard specification for Adhered Manufactured Stone Masonry Veneer Units.

Supporting test data is available upon request.

Local building codes may vary by area. Always check with your local building authorities before installing stone.

For additional technical information please visit: www.dutchqualitystone.com

INGREDIENTS

Light weight aggregate ASTM C33, C330 & C331
Portland cement ASTM C150, ACI 318
Mineral oxide pigments ASTM C979

CODE ACCEPTABILITY & CERTIFICATION

UL Registered
Mineral composition units
Surface burning characteristics
Flame Spread 0
Smoke Developed 0
ICC-ES ESR 1215
ASTM C1670
CE Declaration of Conformity NR #290905-5

FREEZE-THAW DURABILITY

Tested in accordance with ASTM C666 & C1364
Less than 1.5 percent weight loss at 50 cycles; passed
Less than 5 percent weight loss at 300 cycles; passed

SHEAR BOND (ADHESION)

Tested in accordance with ASTM C482

ABSORPTION

Tested in accordance with ASTM C1670

SATURATED DENSITY

Tested in accordance with ASTM C1670
Weight less than 15 lbs. per sq. ft., saturated

THERMAL RESISTANCE

Tested in accordance with ASTM C177
R value: 0.538 (R12-F-hr)/BTU at 1.48" thickness

COMPRESSIVE STRENGTH

Testing in accordance with C192 & C39
Compressive strength is greater than 2100

WEIGHT PER SQUARE FOOT

Tested in accordance with ASTM C1670
All adhered veneer profiles weigh less than 15 lbs. per square foot

WIND LOAD TESTING

Tested in accordance with ASTM C1670



DEALER SUPPORT

We are only as strong as our dealer network. Our resources are focused on making our dealers successful.

STONE SAMPLES

SHOWROOM DISPLAYS

TECHNICAL RESOURCES

LEAD GENERATION

PERSONAL SERVICE





OUTSIDE SALES SUPPORT

We spend our time in the field securing specifications and supporting customers through the building experience

ARCHITECTURAL
PRESENTATIONS

BUILDER
PRESENTATIONS

CONTRACTOR FIELD
SERVICE

SAMPLES

DISTRIBUTOR PLANT
TOURS

ANNUAL STONE
SUMMIT



OPERATIONS

Our facility in Mt. Eaton, OH continues to grow and provide opportunity for the local community through over two decades of operations

RELIABLE WORKFORCE

FOCUS ON
AVAILABILITY

ROOM TO GROW

TOP SERVICE LEVELS

SUPPORTING LOCAL
BUSINESS



THE VALUE OF BORAL

Industry-leading
Safety Culture

Our
People/Stone
Enthusiast

Technical &
Engineering
Expertise

Industry
Leading
Brands &
Category
Awareness



CRAFTSMANSHIP ROOTED IN AGE-OLD TRADITION